

SCALP EVOLUTION RIM'RENOV

CONCENTRATED CLEANING AND GREASE-REMOVING SOLUTION ACID-FREE AND SOLVENT-FREE, FOR WHEEL RIMS



P PRODUCT BENEFITS



- Enhanced grease-removing action
- Easy to use and fast acting
- Powerful grease-removing action
- Acid-free, solvent-free



PACKAGING:

- 1,000 L container
- 210 L barrel
- 20 L: 24 x 20 L pallet
- 5 L: 96 x 5 L pallet

A REAS OF APPLICATION

SCALP EVOLUTION RIM'RENOV has been specially designed for cleaning and restoring light-alloy wheel rims as well as steel rims and hubcaps. It helps remove all traces of dirt caused by air pollution, exhaust-pipe residue, carbonised- and polymerised-oil deposits, brake-plate and mud deposits etc.

This environmentally-friendly product minimises its impact as it contains no acid or solvent, unlike traditionally-used cleaners.

APPLICATION

1.DILUTION: Neat or diluted to a concentration of 50 %, depending on the level of dirt.

2.APPLICATION EQUIPMENT: Sprayer.

<u>3.MODE OF OPERATION</u>: Apply evenly and leave to work for a few minutes, depending on the level of dirt and the nature of the deposit. Rinse thoroughly with pressurised water.

4.APPLICATION TEMPERATURE: 5 °C to 50 °C. Effectiveness is reduced at extreme temperatures.

5. TOOL CLEANING: Clean tools with water straight after application.

6. YIELD: 100 ml / m²

<u>7. STORAGE:</u> Store product in frost-free premises, away from the elements and direct sunlight. Do not store at temperatures < 5 °C.

* Yield information is only provided as a rough guide. This information is useful to determine the amount needed for the work. This information is in no way contractual. The exact quantity of product to be applied can only be established through tests, based on the different surfaces to be treated.


PHYSICO-CHEMICAL FEATURES

- Concentrated liquid detergent
- Colourless liquid
- Density: 1.04 g / cm3 at 20 °C
- pH: 13.2
- Keep from freezing but reversible
- Flash point: None

A PPLICATION PRECAUTIONS

- 1. PROTECTION OF SURFACES: Do not apply product to surfaces that are very hot or have been exposed to the sun. Do not let product dry on rims. It is essential to first test the product on sensitive alloys.
- 2. PROTECTION OF PERSONS: Corrosive product. Wear suitable gloves and safety goggles. Avoid contact with eyes. In the event of splashing, rinse with water.

Important: The contents of this document stem from our experience with the product. We cannot be held liable as far as its use is concerned in every individual case. Given the particular characteristics of each surface (wear and tear, alteration of the entire surface and/or its properties, chemical composition etc.), and to avoid any damage to the surface being treated, it is essential that the Scalp product be tested on a small area to be treated, by following the procedure for application, in order to ensure that no alteration occurs.

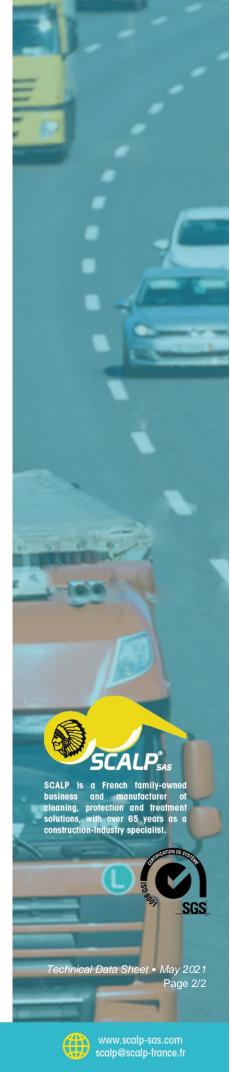



69

Tél.: +33 (0)1 48 48 39 76 Fax: +33 (0)1 48 49 80 36